ACRILIC FIBER S4343

Synthetic Packing, Lubricated with PTFE and Hi-Grade Mineral Oil





PRODUCT DESCRIPTION


Synthetic Packing, Lubricated with PTFE and Hi - Grade Mineral Oil is a synthetic yarn thoroughly impregnated with PTFE Suspensoid, and coated with high grade mineral oil. This style reduces the need for adjustments during break-in periods, extends sleeve life, and reduces down time. PTFE and mineral oill insertions reduce running friction, prevent overheating and glazing, and enhance sealabil.

PERFORMANCE CAPABILITIES

Material	:	Arcylic Fiber Yarn, PTFE and Hi-Grade Mineral Oil
Temperature	:	550°F / 288°C
Pressure	:	Valve 2500 PSI
FPM	:	2000
pH	:	2 - 12
Color	:	White

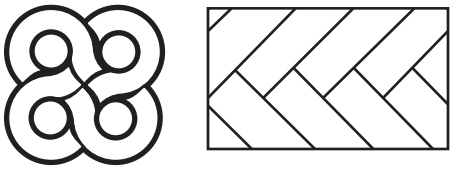

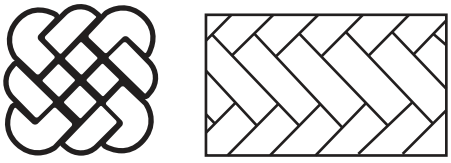

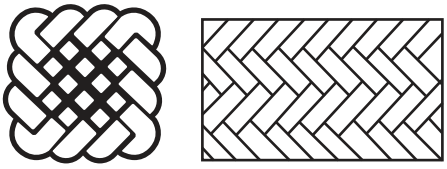

APPLICATIONS

Equipment:
Rotary pumps, reciprocating pumps, agitators and other rotating equipment.

Industries:
Marine, Pulp & Paper, Agriculture
Municipal / Water & Wastewater plants
Oil & Gas, Power generation, Mining and Oil fields.

FDA

Soindus Comercial Ltda.
Germán Ebbinghauss Nº 2969 Puente Alto - Santiago - Chile
Dr. Amador Neghme Nº 03639 Galpón 51 La Pintana - Santiago - Chile
(562) 2567 9613
ventas@soindus.cl
www.soindus.cl